

# BASIC BT 75 / WT 75

CENTRAL INLET FOR SIMULTANEOUS SUCTION OF DUST, SOLIDS AND LIQUIDS

MANUAL FILTER CLEANING DEVICE

STORAGE CONTAINER

TANGENTIAL INLET FOR BETTER DUST SEPARATION FROM THE FILTER

SIDE CHANNEL TURBINE



POLYESTER POCKET FILTER AVAILABLE:

- L - M - M ANTISTATIC CLASS
- 20.000 CM2 30.000 CM2 SURFACES

SECONDARY HEPA FILTER (OPTIONAL)



CYCLONE (OPTIONAL)



TANK QUICK RELEASE FOR FAST DISPOSAL



KIT FOR INSTALLATION OF DISPOSABLE COLLECTION BAGS (OPTIONAL)




## BT 75

TANGENTIAL INLET FOR BETTER DUST SEPARATION FROM THE FILTER

The BT models are industrial vacuum cleaners of the BASIC line with bag or stellar filters. They can be powered with single-phase or three-phase turbine. The vertical design allows the employment even in the tightest spaces of every application sector for general aspiration of dust, and their reliability is guaranteed by the motor with side channel turbine which allows continuous use.



### WORK EFFICIENCY BT 75

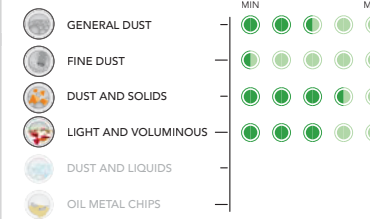

TYPE OF APPLICATION

DUST

DEGREE OF SPECIFICITY



### TECHNICAL DATAS

BASIC	BT 751	BT 753
MOTORIZATION	TURBINE	TURBINE
POWER	2,2 kW	3 kW
VOLTAGE	230 V	400 V
FREQUENCY	50 Hz	50-60 Hz
AIR FLOW	320 m <sup>3</sup> /h	320 m <sup>3</sup> /h
MAX DEPRESSION	300 mBar	320 mBar
VACUUM VALVE	200 mBar	250 mBar
CAPACITY	75 L	75 L
DIMENSIONS	80x60 h 154 cm	80x60 h 154 cm
WEIGHT	100 Kg	100 Kg

VOLTAGES AVAILABLE:  
220 V - 60 HZ • 480 - V - 60 HZ • 500 V - 60 HZ • 575 V - 60 HZ


## WT 75

CENTRAL INLET FOR SIMULTANEOUS SUCTION OF DUST, SOLIDS AND LIQUIDS

The WT models are among the most popular in turbine models on the market of industrial vacuum cleaners because they enjoy excellent reliability through a side channel turbine and have the ability to be multipurpose for the extraction of any kind of debris, whether powdery, solid or liquid. Being polyvalent vacuums they can not be specific, especially for the suction of dust. In addition, by their simplicity and the production capacity of Coyngo, derive rapid models to perform.



### WORK EFFICIENCY WT 75

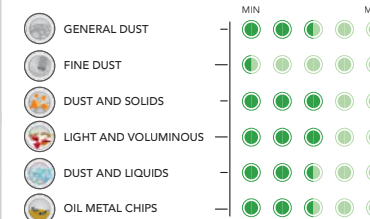

TYPE OF APPLICATION

DUST AND LIQUIDS

DEGREE OF SPECIFICITY



### TECHNICAL DATAS

BASIC	WT 751	WT 753
MOTORIZATION	TURBINE	TURBINE
POWER	2,2 kW	3 kW
VOLTAGE	230 V	400 V
FREQUENCY	50 Hz	50-60 Hz
AIR FLOW	320 m <sup>3</sup> /h	320 m <sup>3</sup> /h
MAX DEPRESSION	300 mBar	320 mBar
VACUUM VALVE	200 mBar	250 mBar
CAPACITY	75 L	75 L
DIMENSIONS	80x60 h 154 cm	80x60 h 154 cm
WEIGHT	100 Kg	100 Kg

VOLTAGES AVAILABLE:  
220 V - 60 HZ • 480 - V - 60 HZ • 500 V - 60 HZ • 575 V - 60 HZ